


DETACHED GARAGE AND SHED FOUNDATIONS

- **120 SQ. FT. OR LESS - NO FOUNDATION REQUIRED.**
- **OVER 120 SQ. FT. TO 180 SQ. FT. - FOUR (4) INCH SLAB WITH 6"X6" - 10/10 GAGE WIRE MESH REQUIRED.**
- **OVER 180 SQ. FT. TO 768 SQ. FT. - FOUNDATION AS SHOWN BELOW MAXIMUM DIMENSIONS OF 24 FT. BY 32 FT. MAXIMUM RAFTER SPAN OF 24 FEET.**
- A MINIMUM 10 FEET SEPARATION IS REQUIRED BETWEEN A DETACHED GARAGE OR SHED AND THE HOUSE. Measurements taken between Overhangs/Eaves of both structures!
- **INSPECTIONS ARE REQUIRED FOR ALL FOUNDATIONS!**
- **CALL FOR AN INSPECTION WHEN: #1 TRENCH IS DUG, #2 REBAR IS TIED IN PLACE, #3 WIRE MESH IS INSTALLED & TIED TO REBAR, #4 FORMS ARE SET!!!**

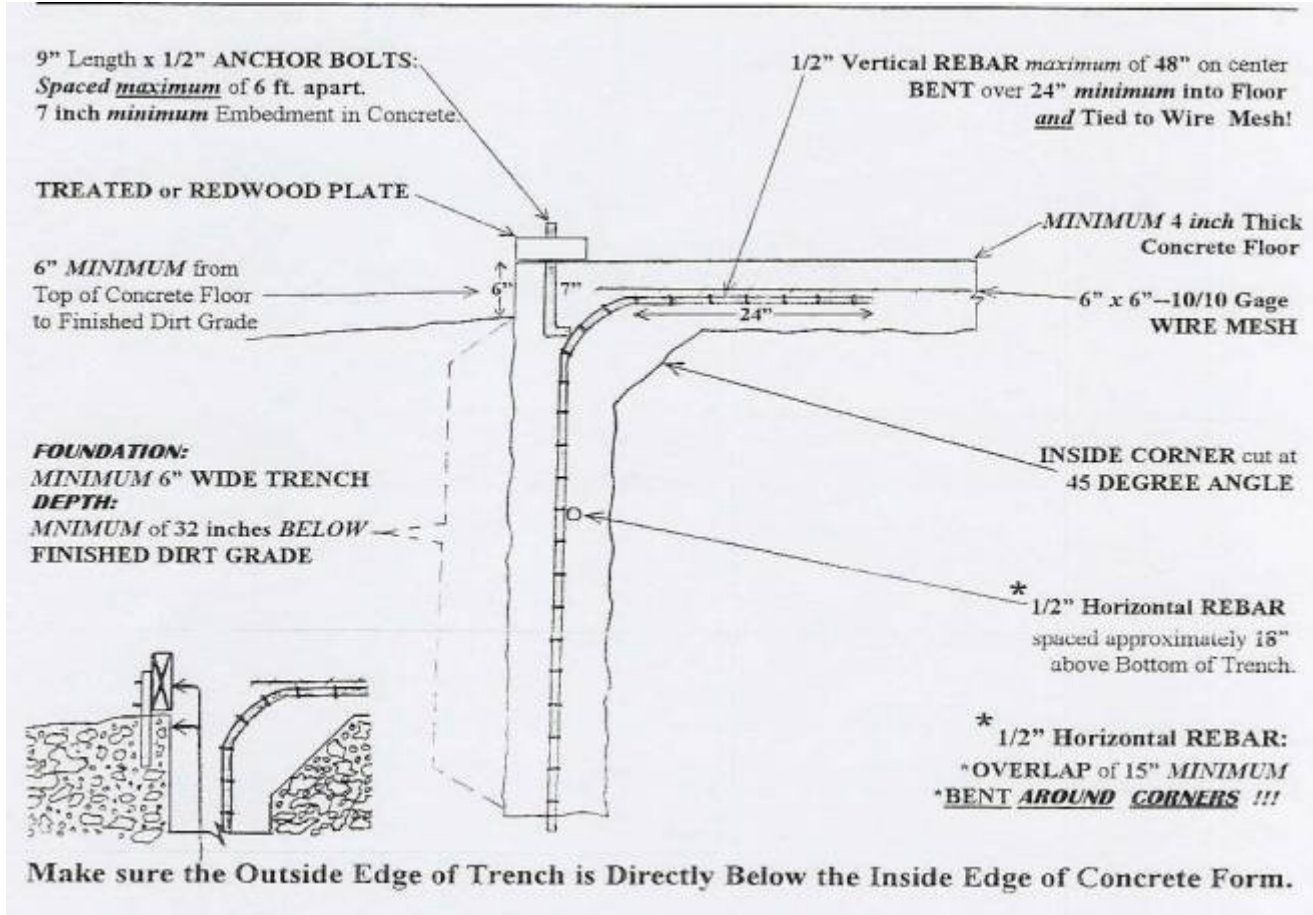

BE SURE TO VERIFY ALL LOCATION RESTRICTIONS

MONOLITHIC FOUNDATION